



Suction and Pressure Pumps

For domestic use of harvested rainwater

- For pumping pre-filtered rainwater
- Sound and vibration insulation with special rubber dampers
- Stable base plate for the the submersible pumps
- WISY 1" brass nozzle
- All connection fittings pre-assembled
- Permanent pump protection due to dirt trap strainer
- Prepared for connecting Various WISY suction filters
- Energy-efficient technology technology, standby operation with less than 0.2 watts



AspriPlus:

Self-priming pump according to the proven WISY design

Multigo:

normal suction, multistage submersible pressure pump



floating suction fine filter SAFF



floating suction coarse filter SAGF

Suction hoses in various lengths from 0.5 to 3 m




fixed mounted suction fine filter FAFF



fixed mounted suction coarse filter

Aspri accessories:

Stainless steel wall bracket with special mounting parts, connecting hose.

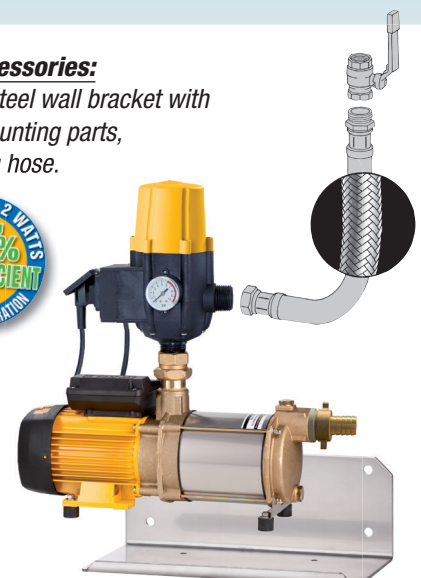

Vielfältiges Zubehör:

WISY Saug- und Druckpumpen können mit den unterschiedlichsten Anschlüssen ausgestattet werden.

AspriPlus suction pump series:


Multistage centrifugal pumps for pumping water from cisterns. Consisting of brass-, stainless steel- and high-quality plastic parts. With mounted brass nipple, with hose screw connection on the suction side, 1" nozzle and integrated strainer. Fitted rubber feet for vibration and noise damping. Switch-on pressure 1.5 bar. **Equipped with Zeta O2 pump controller Standby consumption only 0.2 watts.**

AspriPlus

- self-priming multistage centrifugal pump
- corrosion resistant brass casing
- pump casing, impellers and shaft made of stainless steel
- Very smooth, quiet running
- Thermal overload protection

AspriPlus	maximum delivery head
15/3	34,0 m
15/4	45,0 m
15/5	53,0 m

The „PLUS“ equipment:

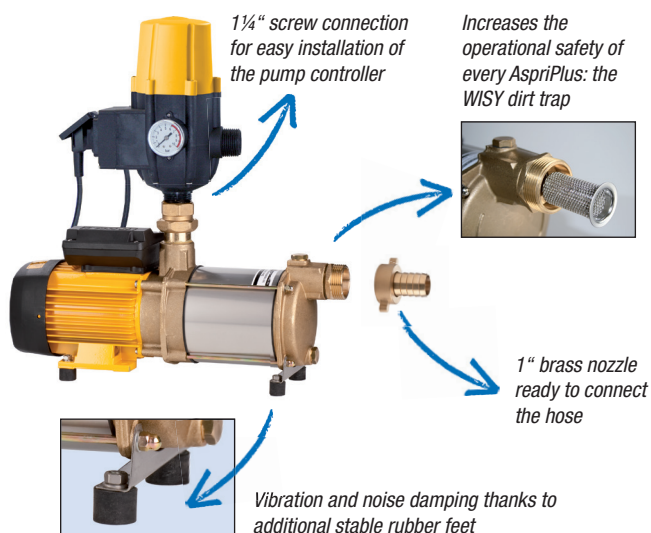

Provedo feed pump series

Single-stage submersible feed pumps, e.g. as a loading pump for the Optima or Maxima rainwater units. With permanently mounted level switch or loose float switch. For pumping clean water, e.g. from rainwater storage tanks. Optional connection of fixed or floating suction filters. With 1" hose nozzle or 1 1/4" threaded connection (IG) or direct suction.



Provedo VX with fixed mounted level switch, nozzle and base plate
170 l/min, 9 m delivery head



Provedo B-1 with loose float switch and direct suction
170 l/min, 9 m delivery head



Provedo 2,3,4 for large systems:
280-350 l/min,
12-17 m delivery head

Multigo pressure pump series:

Multistage submersible pressure pumps with the option of connecting of fixed or floating suction filters. The suction filters protect the pump from sediments and increase the safety of every rainwater system.

Complete equipment:

With 3 m support cable, 20 m connection cable, stable base plate 220 x 220 mm, Zeta O2 pump controller, switch-on pressure 1.5 bar, with pressure gauge and Schuko socket, 2x1" outside thread, operating indicator (LEDs). Wall bracket WH 03 06 made of stainless steel with fixing kit and lock nut.

Multigo

- normal suction multistage centrifugal pump
- up to approx. 18 m immersion depth
- Motor cooling through water flowing between outer housing and motor housing
- All housing parts made of stainless steel
- Protection class IP 68
- suitable for continuous operation

Multigo	maximum delivery head	maximum delivery head
205	80 l/min.	48 m
407	120 l/min.	49 m
207	80 l/min.	61 m



Accessories

Stainless steel support bracket for horizontal mounting. (e.g. in ribbed plastic cisterns)



WISY AG
D-63699 Kefenrod, Oberdorfstraße 26
Telefon +49 (0) 60 54-91 21-0

Fax +49 (0) 60 54-91 21-29
Internet: www.wisy.de
E-Mail: info@wisy.de